



"Give some bite to your engine!"


Form Oil

Paraffinic Mineral Oil



Cobra FORM OILS are a high quality refined paraffinic mineral oil designed as a wetting and release agent for concrete forms and ease the removal of these forms. Also suited as a commercial rust prevention liquid.

Cobra FORM OILS are also well suited especially in the manufacture of precast concrete structures, walls, pipe, curbs, and beams.

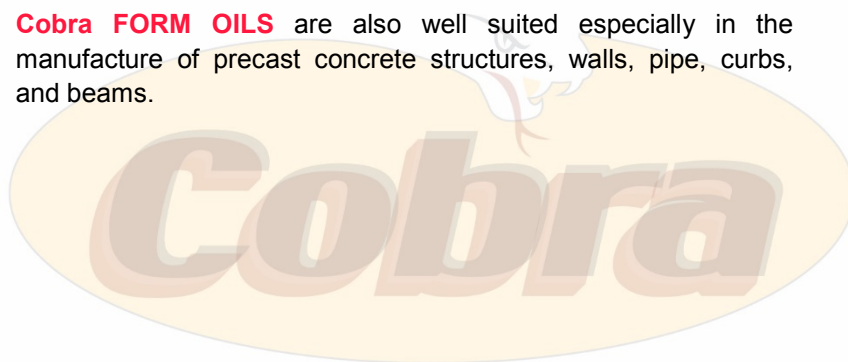

Features and Benefits

- Prime quality paraffinic oil
- Great compatibility in most oil polymer mixtures
- Low coloration
- Separate readily from water

Typical Characteristics

TEST METHOD	COBRA FORM OIL 26
VISCOSITY (D445) cSt@ 40°C	24.7
DENSITY @ 15°C (D4052) kg/L	0.8504
ASTM COLOUR (D1500)	1.0
POUR POINT (D97) °C	-39

Sizes and Order Codes

COBRA FORM OIL 26
205 L / 54.2 US Gal FBB0013750
100 L / 26.4 US Gal FBB0013760

Please visit www.cobralubricants.com for more information.

Supporting data available to demonstrate acceptable performance. Check with your account representative for the latest product approvals. Note, these are typical performance indicators and can change without notice. This data sheet supersedes any previous version prior to 12/16/2019