

# New NPE-A2 and NPE-S2 Condensing Tankless Water Heaters

The best selling  
condensing  
tankless water  
heater just got  
even better



The original Navien NPE is the leading condensing unit on the market and the new NPE-2 will extend that lead with more advancing technology.

# NPE-2 PREMIUM EFFICIENCY CONDENSING TANKLESS WATER HEATERS

Navien...the proven leader in condensing tankless, makes it even easier to sell, install and set up with new NPE-2 series

## Cuts installation time in half

Thanks to using 1/2" gas pipe and 2" PVC venting, you can install a Navien tankless water heater in about half the time as competitive tankless heaters. Not to mention, Navien EZNav™ intuitive controls with setup wizard makes startup a simple and fast process.

## Fewer callbacks, longer life, faster heating

Navien was first to offer dual stainless steel heat exchangers which helps extend the life of the unit by resisting corrosion.

## Saves energy, easier on the planet

Navien condensing stainless steel heat exchangers recover extra heat that would be lost in non-condensing units. Lower CO<sub>2</sub> emissions and low exhaust temperatures allows for less expensive venting materials like schedule 40 PVC.

**NPE-A2**  
Advanced water heaters

**NPE-S2**  
Standard water heaters



## NPE-2 temperature rise

Temp Rise (°F)	150S2 GPM (L/m)	180A2/S2 GPM (L/m)	210A2/S2 GPM (L/m)	240A2/S2 GPM (L/m)
35	6.8 (26)	8.4 (32)	10.1 (38)	11.2 (42)
40	5.9 (22)	7.4 (28)	8.8 (33)	9.8 (37)
45	5.3 (20)	6.5 (25)	7.8 (30)	8.7 (33)
50	4.8 (18)	5.9 (22)	7.1 (27)	7.8 (30)
55	4.3 (16)	5.3 (20)	6.4 (24)	7.1 (27)
60	4.0 (15)	4.9 (19)	5.9 (22)	6.5 (25)
65	3.7 (14)	4.5 (17)	5.4 (20)	6.0 (23)
70	3.4 (13)	4.2 (16)	5.0 (19)	5.6 (21)
75	3.2 (12)	3.9 (15)	4.7 (18)	5.2 (20)
80	3.0 (11)	3.7 (14)	4.4 (17)	4.9 (19)
85	2.8 (11)	3.5 (13)	4.2 (16)	4.6 (17)
90	2.6 (10)	3.3 (12)	3.9 (15)	4.4 (17)
100	2.4 (9)	2.9 (11)	3.5 (13)	3.9 (15)
110	2.2 (8)	2.7 (10)	3.2 (12)	3.6 (14)
120	2.0 (8)	2.5 (9)	2.9 (11)	3.3 (12)
130	1.8 (7)	2.3 (9)	2.7 (10)	3.0 (11)
140	1.7 (6)	2.1 (8)	2.5 (9)	2.8 (11)

## NPE-2 DHW capacity

Models	Natural gas (BTU/H)	Propane gas (BTU/H)
NPE-150S2	18,000–120,000	18,000–120,000
NPE-180A2/S2	10,000–150,000	10,000–150,000
NPE-210A2/S2	12,000–180,000	12,000–180,000
NPE-240A2/S2	13,300–199,900	13,300–199,900

## NPE-2 operating cost

Navien tankless	179 therms	\$195*
Other tankless	209 therms	\$228*
Standard tank	269 therms	\$293*

\*Based on Energy Guide cost estimates using \$1.09 per therm of natural gas. Cost is in US dollars.

## U.S. Green Building Council LEED Points\*

Water heater	Location	Recirculation
1.5 Points	2 Points	3 Points

## Lower HERS home index score\*

\*Please consult your Energy/LEED consultant.

## NPE-2 warranty

	Application	Labor	Parts	Heat exchanger
Residential	Standard or controlled recirculation	1 year	5 years	15 years
	Uncontrolled recirculation	1 year	3 years	5 years
Commercial or Combi*	Standard or controlled recirculation	1 year	5 years	8 years
	Uncontrolled recirculation	1 year	3 years	3 years

\*Combi refers to a combination potable water and space heating application. Water heaters cannot be used in space heating only applications. For complete details please refer to the full warranty at Navieninc.com.



**High efficiency**  
up to  
**0.96 UEF**  
and up to  
**15:1 TDR**

**2" PVC**  
up to  
**75 feet**  
and  
**1/2" gas**  
up to  
**24 feet**

**Durable dual  
Stainless  
Steel**  
heat  
exchangers

**ComfortFlow®**  
NPE-A2 internal  
buffer tank  
and recirc  
pump

**Optional  
NaviCirc™**  
Easy to  
install with  
no recirc  
return loop  
needed

**EZNav™**  
multi-line  
control with  
built-in  
intuitive  
software

**Optional  
HotButton®**  
system  
now with  
built-in  
controller

It's **easy** to spot why Navien will be the best selling condensing tankless...**again**

# NPE-A2

## NAVIEN PREMIUM EFFICIENCY ADVANCED CONDENSING TANKLESS WATER HEATERS



Our advanced ultra high efficiency tankless technology with built in recirc pump, buffer tank and more

### ComfortFlow<sup>®</sup>

#### NPE-A2 built-in recirculation system

Navien's patented ComfortFlow<sup>®</sup> system is the first to include a buffer tank, recirculation pump and fine-tuned controls into a tankless water heater, resolving the cold-water sandwich effect\* and issues of minimal flow rates commonly found in other tankless water heaters.

\* The "cold-water sandwich effect" is the undesired introduction of cold water into the hot water supply line on occasions of frequent on/off operations.  
(Measure Guideline : Transitioning to a Tankless Water heater, DOE, Sept.2012).



### EZNav<sup>™</sup>

#### Multi-line control with built-in intuitive software


Navien's new backlit EZNav<sup>™</sup> control panel uses simple text and icons to make set up, operation status and troubleshooting faster and easier than ever before.



## Navi<sup>irc</sup>

### Optional NPE-2 recirculation valve

Designed for recirculation of domestic hot water in applications where a dedicated return line is not available. External pump necessary for NPE-S2 not included.

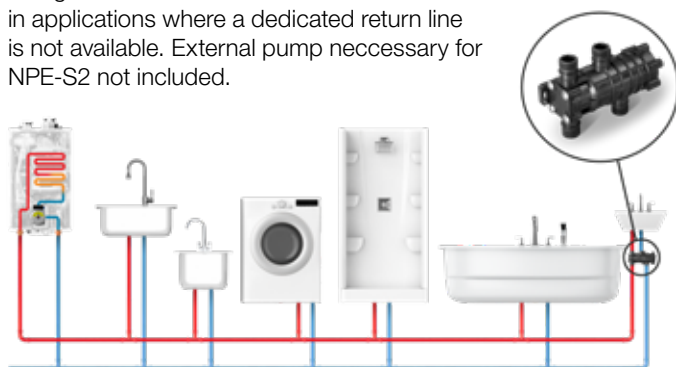

## HotButton<sup>®</sup>

### Optional NPE-2 hot water activation system

At the push of a button, the HotButton<sup>®</sup> hot water system activates internal recirculation pump and gas fired burner to heat water in the supply lines to provide hot water only when needed. NPE-2 comes with a built-in HotButton controller.

External pump necessary for NPE-S2 is not included.




## H<sub>2</sub>Air<sup>®</sup>

### NPE-A2 combination heating & DHW system

The optional H<sub>2</sub>Air<sup>®</sup> Kit utilizes the NPE-A2 pump to circulate the hot water for the hydronic air handler.

This removes the need to purchase an additional circulator for the heating system. Designed for retrofit and new construction, the Navien H<sub>2</sub>Air Kit includes an add-on controller to integrate space heating and DHW between any NPE-A2 Series tankless water heater and a hydronic air handler.

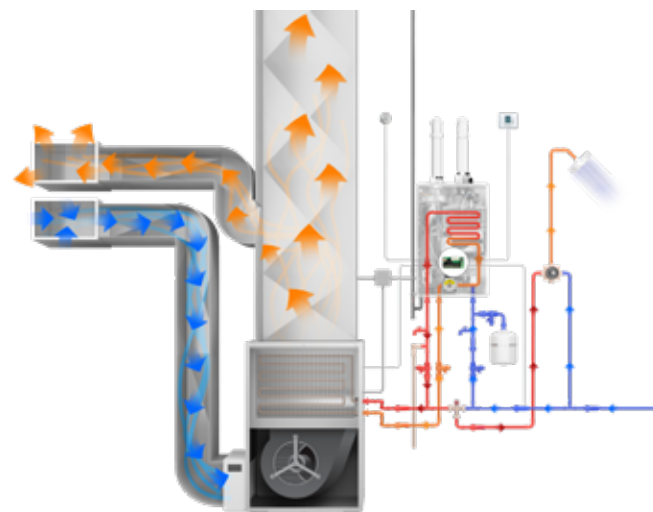

# NPE-S2

## NAVIEN PREMIUM EFFICIENCY STANDARD CONDENSING TANKLESS WATER HEATERS



Our standard ultra high efficiency tankless with higher performance and technology

**When it comes to water heater performance... it's all about the output**

The NPE-S2 condensing tankless water heaters are so efficient that they outperform much larger capacity non-condensing competitors. More output for the money, lower installation costs and lower operating costs for customers making it the best choice for your next installation.




**Navien NPE-S2 condensing tankless water heaters outperform comparably priced non-condensing units**

	NON-CONDENSING	NAVIEN NPE-S2
INPUT: 199,000 BTU/H	INPUT: 199,000 BTU/H	INPUT: 180,000 BTU/H
OUTPUT: ~163,000 BTU/H	OUTPUT: ~163,000 BTU/H	OUTPUT: ~178,000 BTU/H

	Non-Condensing Tankless	Navien NPE-210S2 Condensing Tankless
Input	199,000 BTU/H	180,000 BTU/H
Uniform Energy Factor (UEF)	~0.81	0.96
Output	~163,000	~178,000
Max GPM	9.8	10.1
List Price	\$	\$
Installation Time	~4-8 Hours	4 Hours
Venting	Other type (not PVC)	2" PVC
Gas Pipe	Typically 3/4" pipe	Can use existing 1/2" pipe
Overall		Your Choice?

**Cascade up to 32 units and common vent up to 12 units**

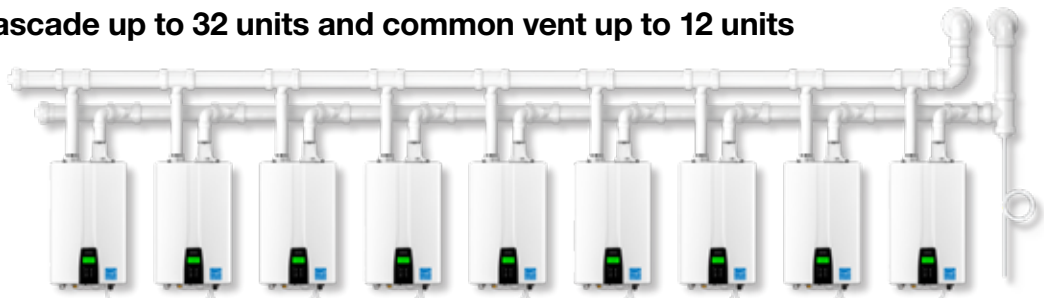

With Navien cascading technology, when a unit gets up to 80% capacity the next unit will turn on to help meet requirements. This demand ratio will continue until all 32 units are generating hot water. The Navien cascading system also balances out the workload of each unit for longer life. Building penetrations are reduced with Navien's common venting feature.

More innovative  
accessories for NPE-2  
tankless water heaters



#### Optional Wi-Fi remote control system



This add-on accessory will enable customers with smartphones and tablets to control temperatures remotely, access usage data and receive diagnostic notifications on all Navien NPE-A2 and NPE-S2 tankless water heaters.




#### Modular manifold mounting on wall or rack

- Simply no waiting for custom racks
- Simply easy to install, easy to assemble
- Simply more profitable
- Simply visit your local Navien wholesaler and pick up everything you need for your installation today.



## Dimensions

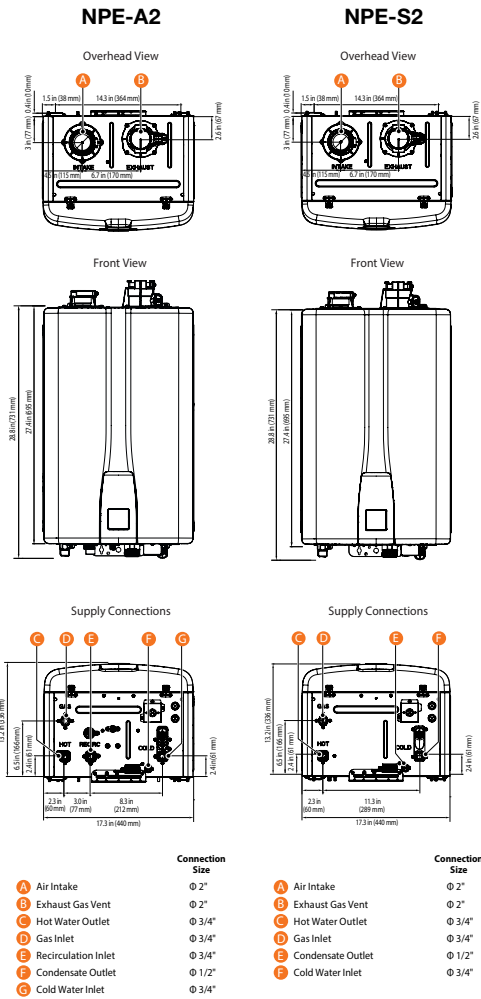

## Specifications

Item		NPE-150S2	NPE-180A2	NPE-180S2	NPE-210A2	NPE-210S2	NPE-240A2	NPE-240S2
Heat capacity (input)	Natural gas	18,000–120,000 BTU/H	10,000–150,000 BTU/H		12,000–180,000 BTU/H		13,300–199,900 BTU/H	
Energy factor	UEF (for NG & LP)	0.93	0.95	0.96	0.95	0.96	0.95	0.96
Flow rate (DHW)	35°F (19°C) temp rise	6.8 GPM (26 L/m)	8.4 GPM (32 L/m)		10.1 GPM (38 L/m)		11.2 GPM (42 L/m)	
	45°F (25°C) temp rise	5.3 GPM (20 L/m)	6.5 GPM (25 L/m)		7.8 GPM (30 L/m)		8.7 GPM (33 L/m)	
	67°F (36°C) temp rise	3.4 GPM (13 L/m)	4.3 GPM (16 L/m)	4.4 GPM (17 L/m)	5.1 GPM (19 L/m)	5.3 GPM (20 L/m)	5.6 GPM (21 L/m)	5.8 GPM (22 L/m)
Dimensions		17.3" (W) x 27.4" (H) x 13.2" (D)						
Weight		62 lbs (28 kg)	73 lbs (33 kg)	68 lbs (31 kg)	77 lbs (35 kg)	73 lbs (33 kg)	77 lbs (35 kg)	73 lbs (33 kg)
Installation type		Indoor or outdoor wall-hung						
Venting type		Forced draft direct-vent						
Ignition		Electronic ignition						
Water pressure		15–150 PSI						
Natural gas supply pressure (from source)		3.5" WC–10.5" WC						
Propane gas supply pressure (from source)		8" WC–13" WC						
Natural gas manifold pressure (min-max)		-0.04" WC– -0.40" WC	-0.03" WC– -0.55" WC		-0.03" WC– -0.76" WC		-0.03" WC– -0.96" WC	
Propane gas manifold pressure (min-max)		-0.03" WC– -0.40" WC	-0.02" WC– -0.55" WC		-0.02" WC– -0.76" WC		-0.02" WC– -0.96" WC	
Minimum flow rate		0.5 GPM (1.9 L/m), < 0.01 GPM (0.04 L/m) option for "A2" models*						
Connection sizes	Cold water inlet	3/4" NPT						
	How water outlet	3/4" NPT						
	Gas inlet	3/4" NPT						
Power supply	Main supply	120V AC, 60 Hz						
	Maximum power consumption	200 W (max 2 A), 350 W (max 4 A) with external pump connected						
Materials	Casing	Cold rolled carbon steel						
	Heat exchangers	Primary heat exchanger: stainless steel Secondary heat exchanger: stainless steel						
Venting	Exhaust	2" or 3" PVC, CPVC, approved polypropylene and stainless steel 2" or 3" special gas vent type BH (Class II, A/B/C)						
	Intake	2" or 3" PVC, CPVC, approved polypropylene and stainless steel 2" or 3" special gas vent type BH (Class II, A/B/C)						
	Vent clearances	0" to combustibles						
High elevations		10,100 feet for both NG or LP gas. Please refer to Installation Manual for additional details and instructions.						
Safety devices		Flame rod, APS, ignition operation detector, water temperature high limit switch, exhaust temperature high limit sensor, power surge fuse, burner high limit fuse, vent installation detector (VID)						

\*Available for "A2" models configured in an optional ComfortFlow® recirculation mode. Energy consumption will increase when the system is configured for recirculation. Navien reserves the right to change specifications at any time without prior notice. Please refer to [www.Navieninc.com](http://www.Navieninc.com) to verify you have the most current information.



## Accessories

<b>NaviLink® Wi-Fi Control</b> PBCM-AS-001	<b>H2Air® Kit</b> AHU Optimizer PNBD-000001	<b>Remote Controller</b> for NPE-2 30022717B	<b>Plumb Easy Valve</b> 3/4" with Relief Valve 30009323A	<b>Plumb Easy 3 Valve</b> Set for NPE-A2 30022163A	<b>Plumb Easy Valve</b> 3/4" with Relief Valve (designed to work with pipe cover) 30012581A	<b>NaviCirc™</b> Recirculation Valve for NPE-A2 NaviCirc™ PFFW-SXX-001 NaviCirc™ Kit 30022965A	<b>HotButton®</b> Components Wall Plate GXXX001427 Push Button GXXX001426	<b>Residential</b> Neutralizer 1 unit GXXX001322 <b>Residential</b> Replacement Media GXXX001323
<b>Light Commercial</b> Neutralizer GXXX001324 <b>Light Commercial</b> Replacement Media GXXX001328	<b>Commercial</b> Neutralizer GXXX001325 <b>Commercial</b> Replacement Media GXXX001329	<b>2" and 3" Wall</b> Flange and Vent Terminator Kit 2" Kit 30010747A 3" Kit 30003873B	<b>PeakFlow S</b> Scale Prevention System GFWC110001AC001 <b>PeakFlowS</b> Replacement Filter GFWC110GD001	<b>Common Vent</b> Collar Kit 30014367B <b>Includes</b> Cascade Cable GXXX000546	<b>Cascade Cable</b> GXXX000546 <b>External Pump Wire</b> GXXX001319	<b>Vent Cap</b> NPE-2 Series 30025801A	<b>Pipe Cover</b> NPE-2 Series 30025812A <b>Use with</b> Isolation Valves 30012581A	<b>Ready-Link® Rack</b> Base (V3) GFFMKDIZUS-005 <b>Add-on (V3)</b> GFFMKDIZUS-006

Navien Inc., 20 Goodyear, Irvine, CA 92618 800-519-8794 [Navieninc.com](http://Navieninc.com)



THE LEADER IN CONDENSING TECHNOLOGY